



WATCH VIDEO



KD1814-SY-C

Vision Laser Cutting Machine With Safe Cover

INTRODUCTION

The KASU KD1814-SY-C Vision Laser Cutting Machine With Safe Cover is the laser cutting machine combined with the advanced top vision software system of the KASU laser.

KD1814-SY-C double asynchronous laser cutting heads are installed in two separate guide rails, cutting different shapes of patterns. It supports continuous joint cutting of oversized patterns over 1400mm in length. And the all-around safety cover model is specially designed to meet the government requirements for plant safety.

Effective Working Area:

Vision: 1800*1200MM

Non Vision: 1800*1400MM

It supports one-time cutting of plain fabrics with 1800*1400mm under non-vision working mode and 1800*1200mm under vision working mode. It can automatically recognize the contour of the printed or embroidered fabrics, leather, and other flexible materials and then cut with super high accuracy and efficiency.

APPLICATIONS



Sportswear



Printing Leather




Clothing



Banner



Toy

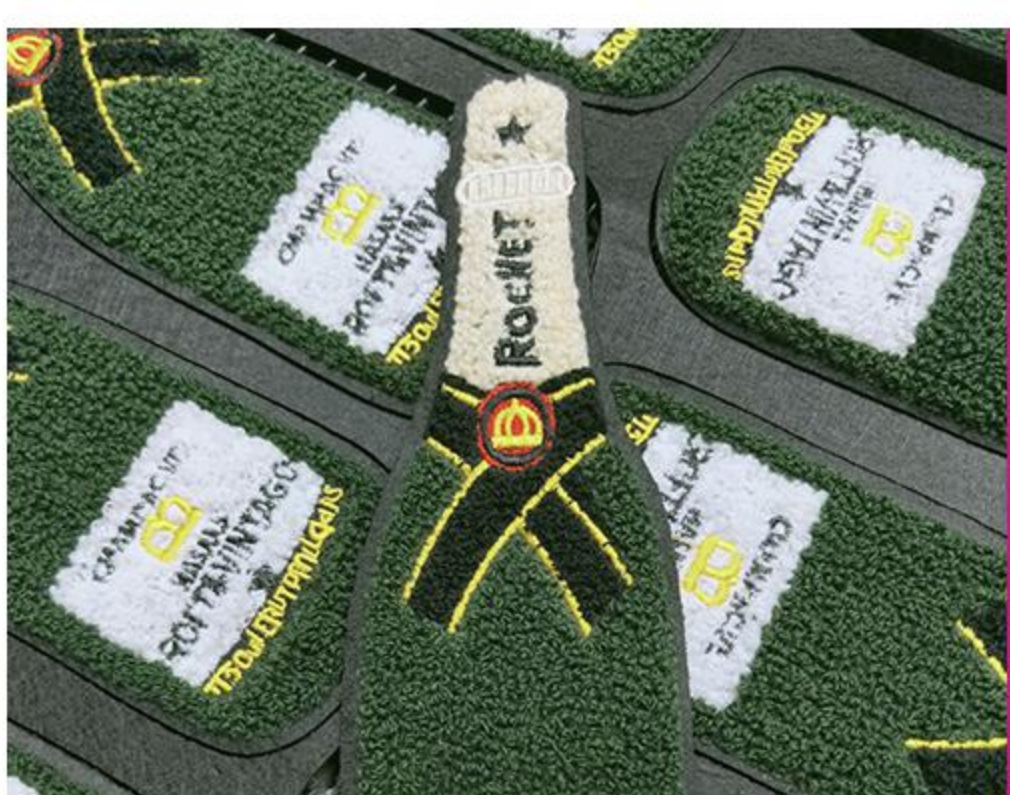

Applique



Embroidery



Lace

■ KEY FEATURES



All-Round Safe Cover
Meet Compliance
Requirements



Doubled Cutting Efficiency,
Higher Productivity



Both Vision and Non-Vision
Working Modes



Stable and
24 Hours Running



Super Simple
to Operate


■ Self-Owned Large Vision Software System

KASU owns the full property of the large vision software system. Together with the Canon EOS Camera with 2,400 Mega Pixels, the KD1814-SY-C camera laser cutter's vision software automates the whole graphic detection and position cutting process.




■ Auto Feeding Conveyor Table

KD1814-SY-C is equipped with a chain conveyor belt, which can auto-feed the roll material right after the laser cutting process. With the optional active feeder, the operator only needs to take care of the cut pattern pick-up job.

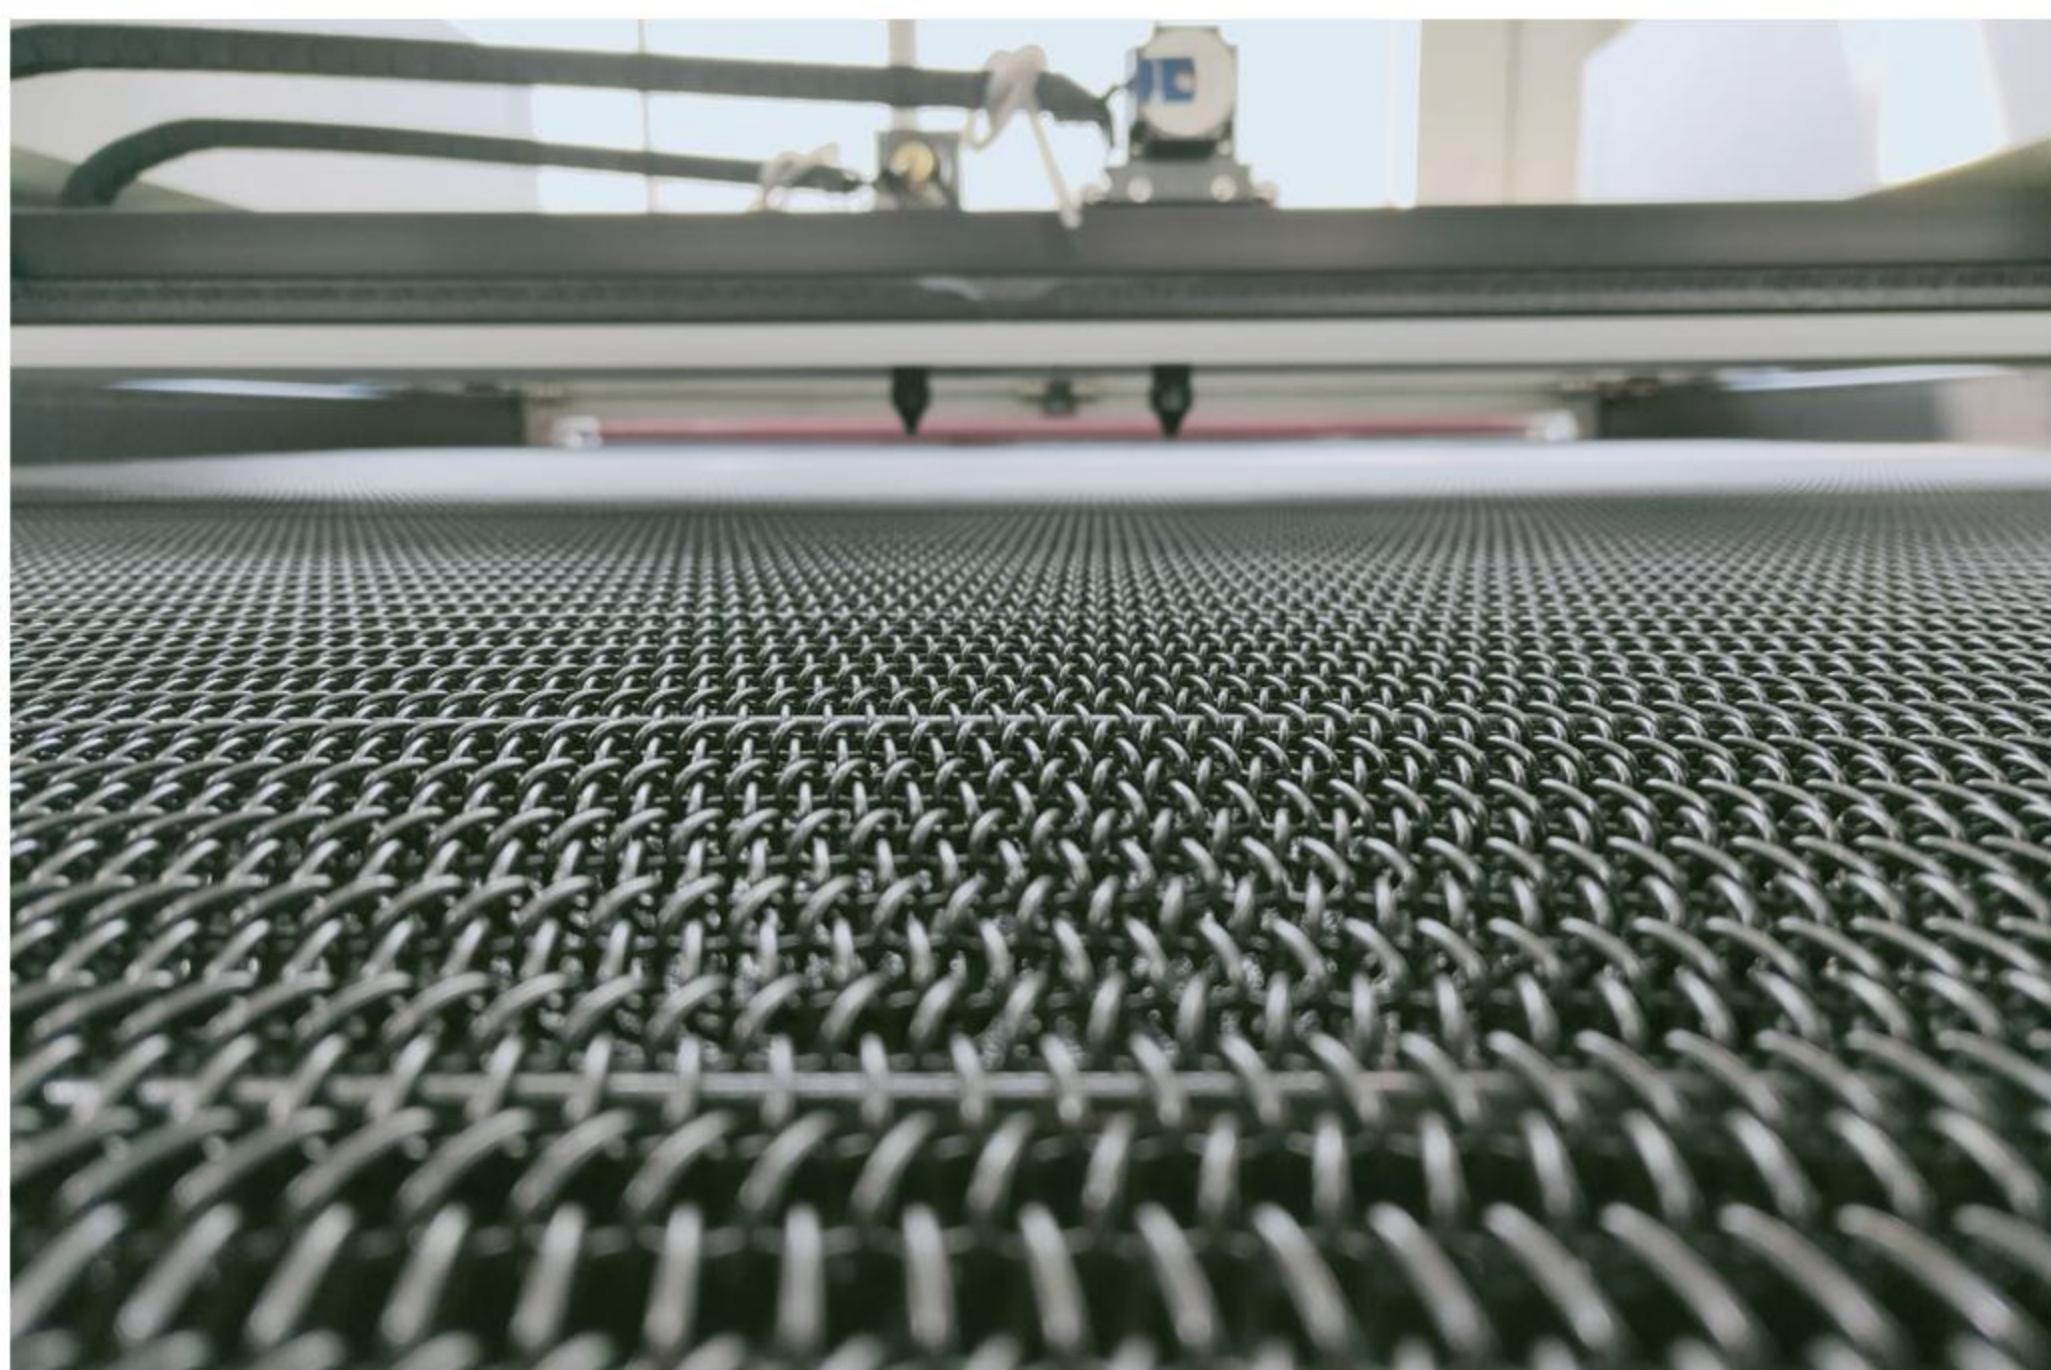


■ Dual-Heads With Dual-Guidrails

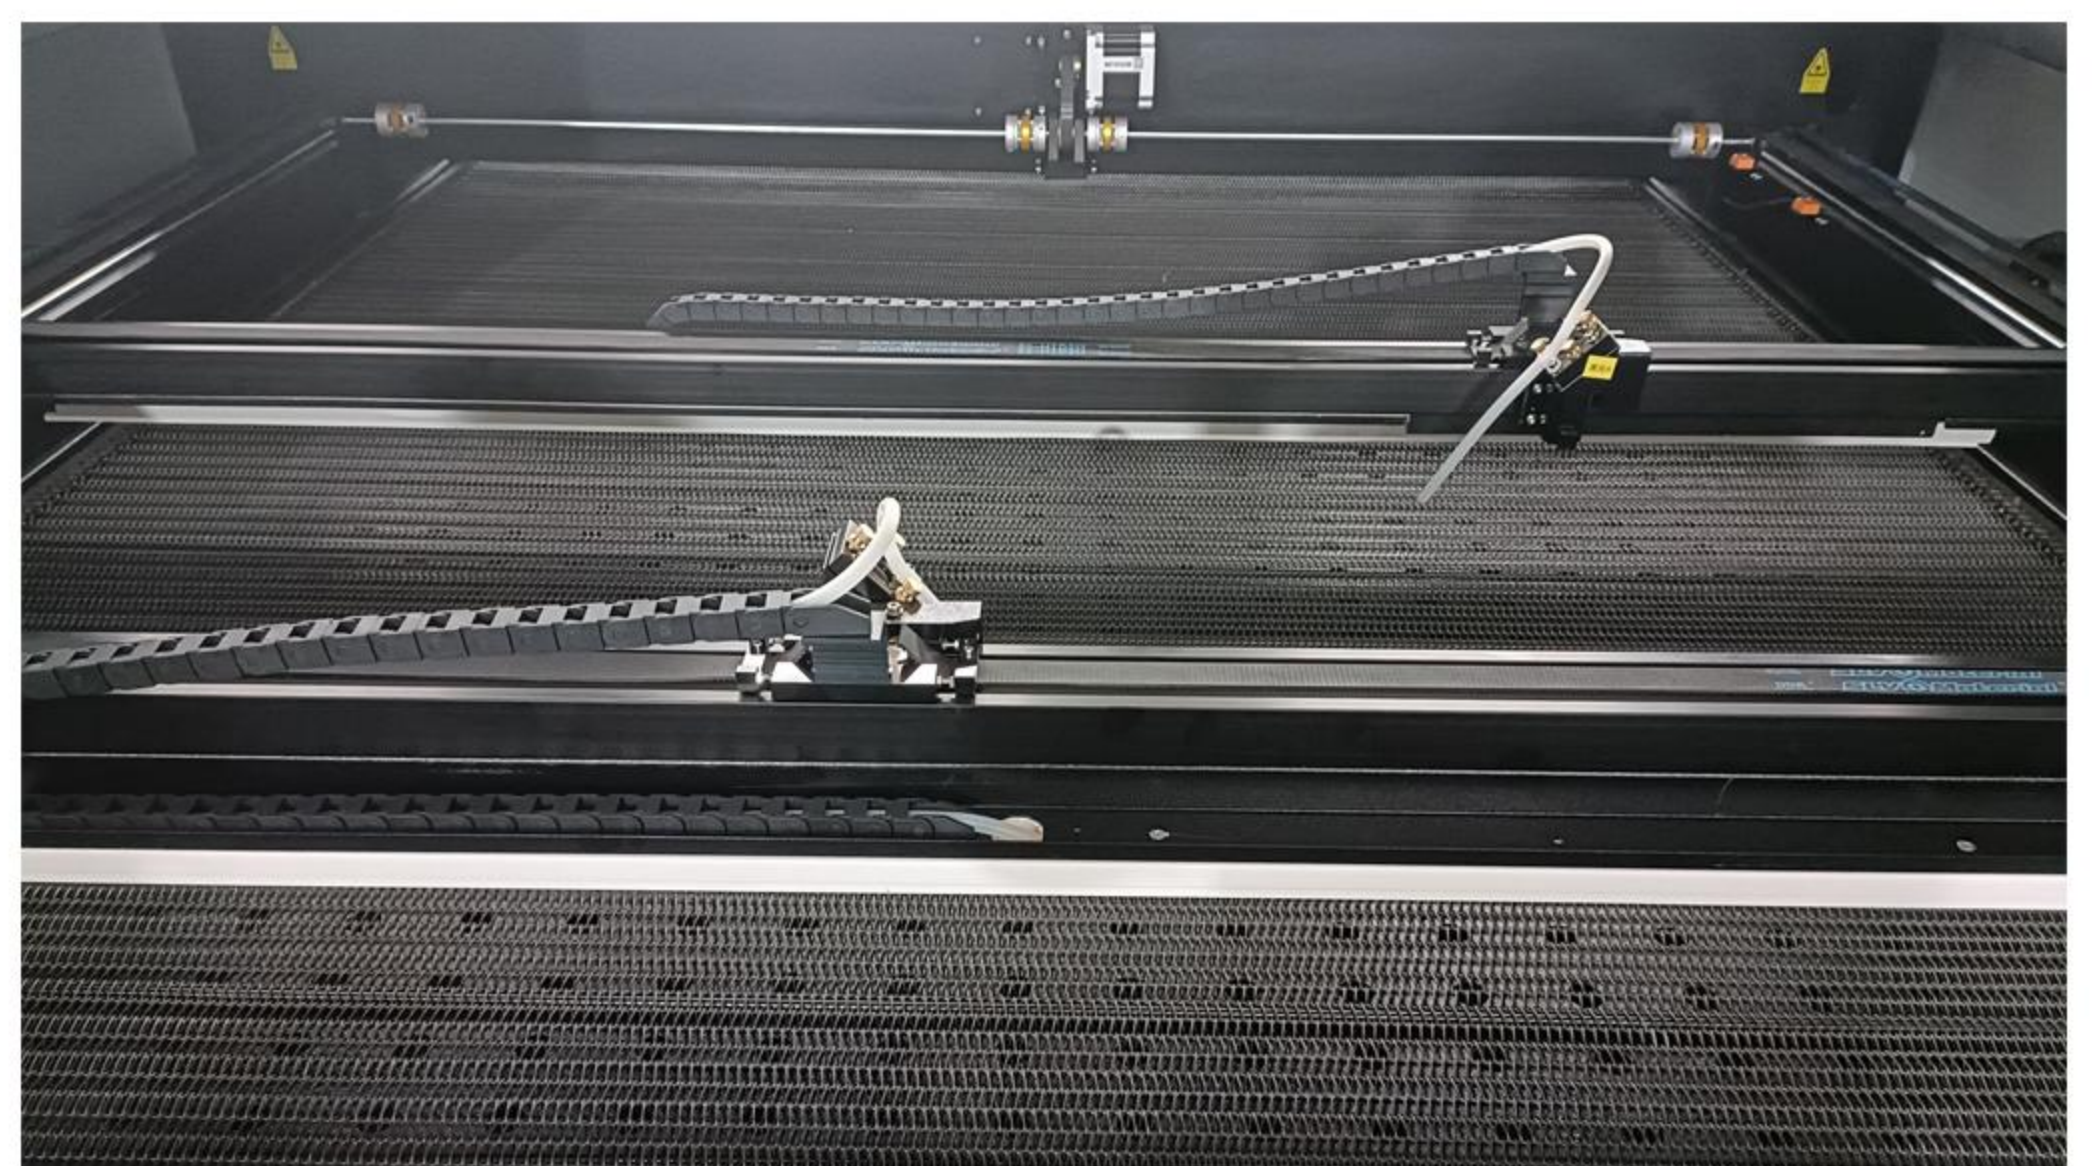

Unlike the dual heads with single guide rail model, KD1814-S2-C, the innovative invention of KD1814-SY-C ensures the two heads of the camera laser cutter can cut either same or different designed patterns at the same time.

■ All-Round Safe Cover

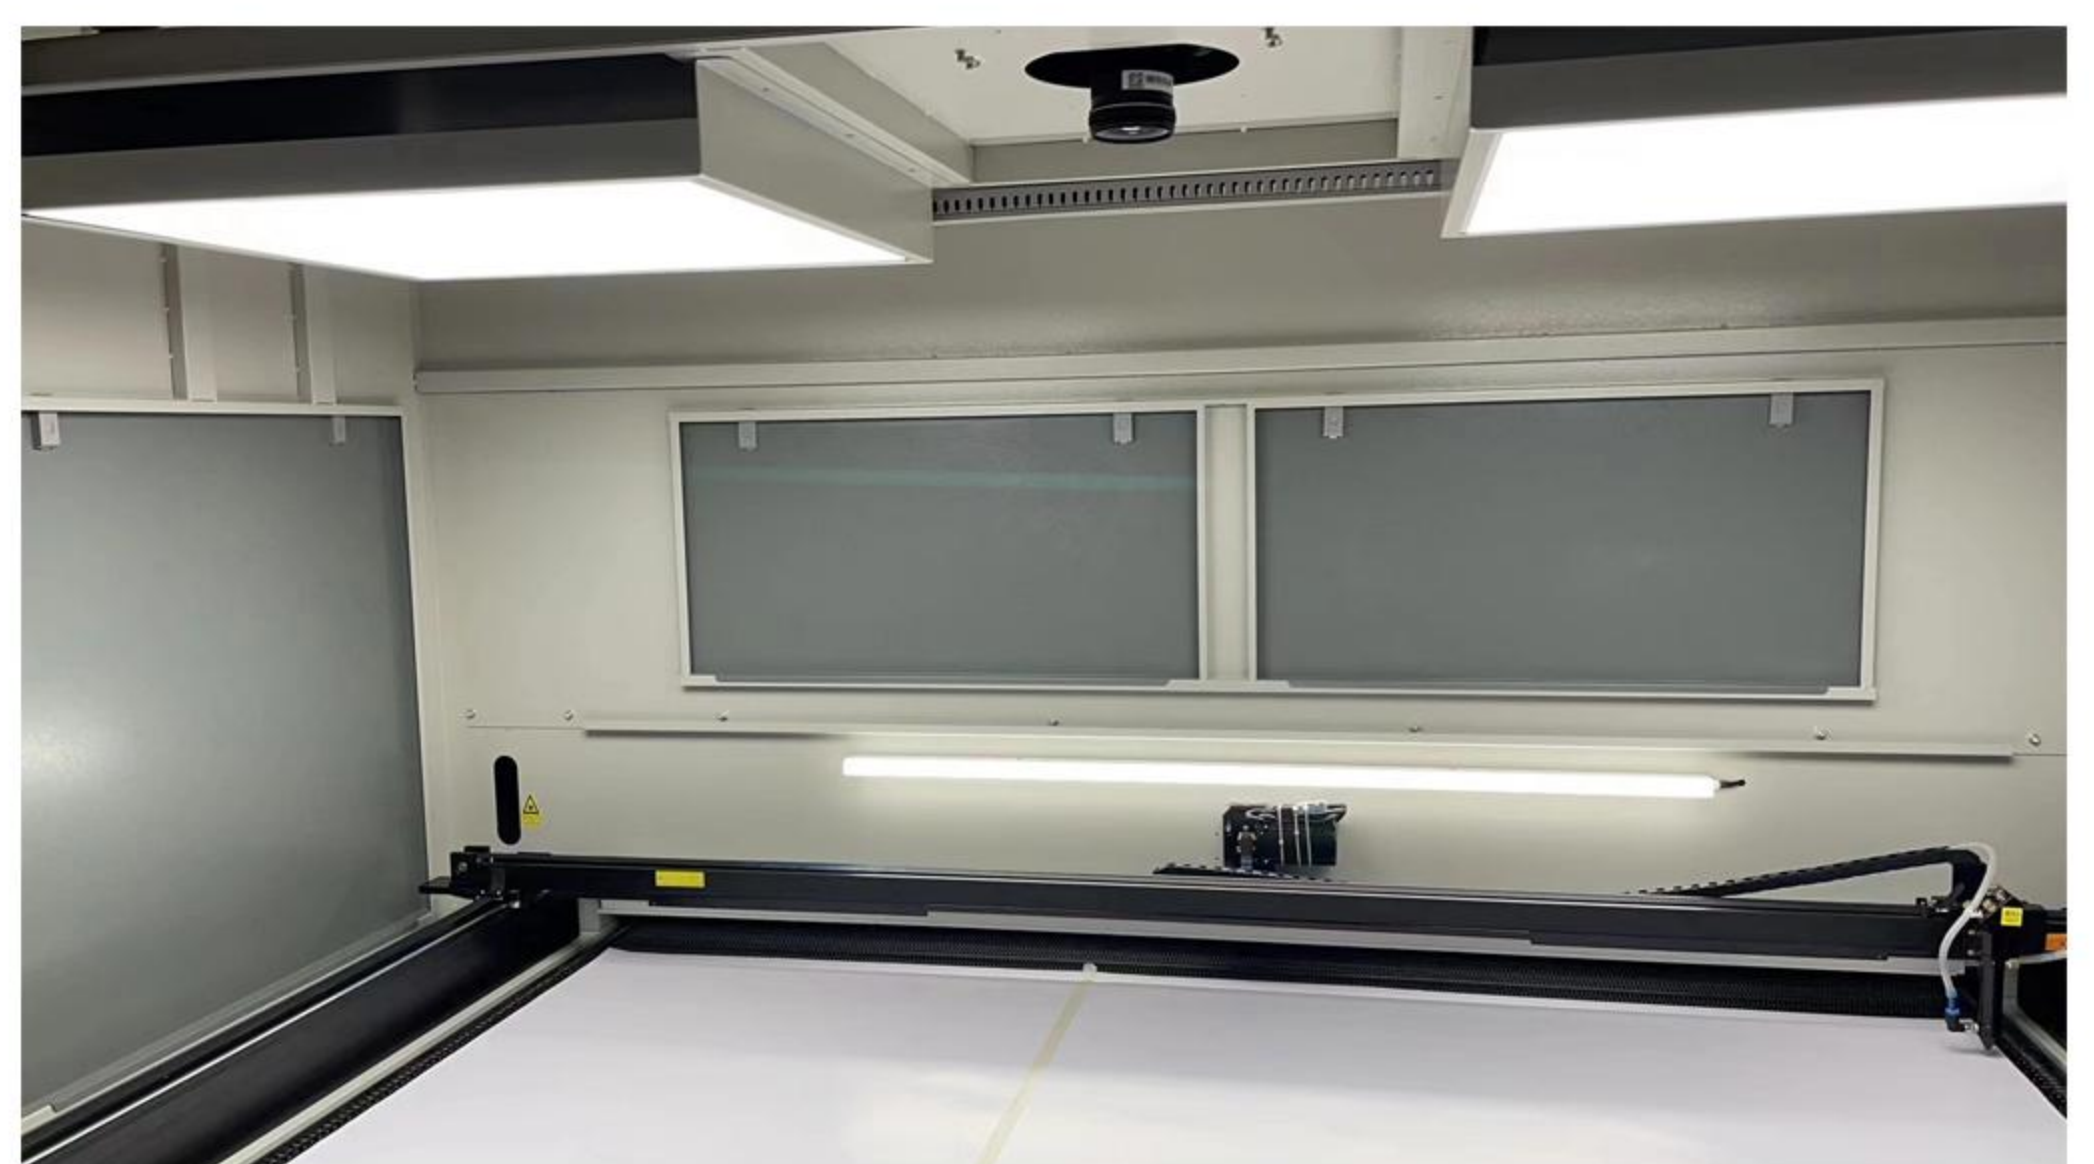


We designed this specialized model based on some clients' government compliance requirements. The all-round safe cover can enclose the whole cutting range. The laser cutter will stop the laser cutting head immediately if the cover is opened.

■ TOP QUALITY SPARE PARTS



Control Card

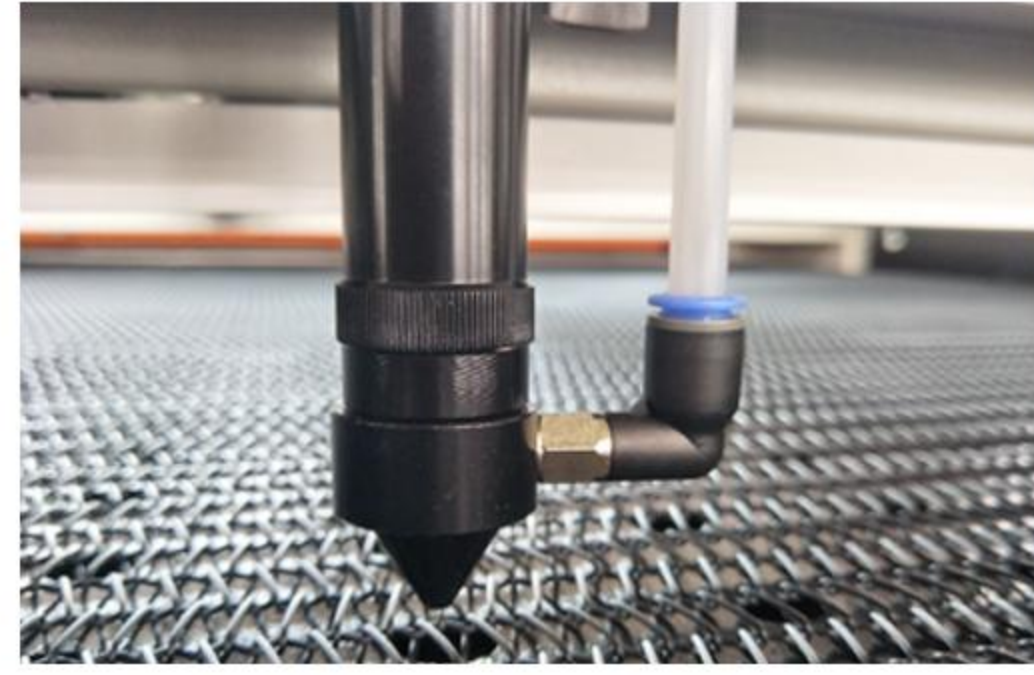

Cutting Head



Glass Tube



Laser Power



AC Water Chiller



Exhausting Fan



Air Pump




Lense



Stainless Steel Screw



Motion Module

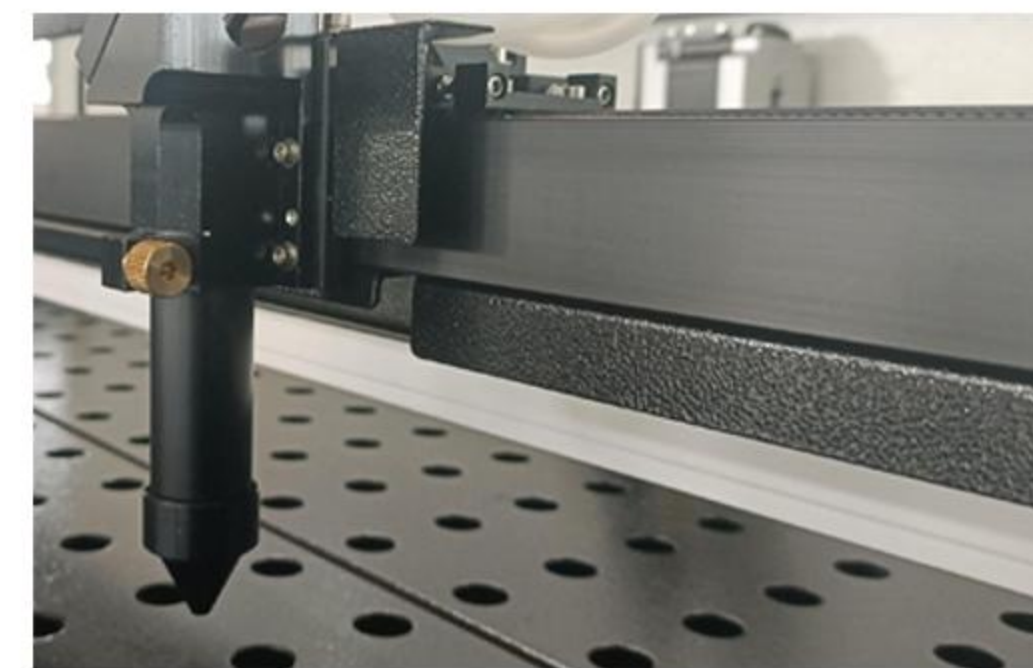

Guide Rail



Spare Parts Tool Kit

To keep your laser cutter running for years, we provide you high quality spare parts verified by our QC process. And we offer replacing spare parts to our clients at COST PRICE just to ensure you have the best using experience and lowest maintenance cost.

■ SAFETY DESIGN

Following the safety standards, we try everything to make a reliable machine to protect both your operator and your laser machine.



All-Round Safe Cover



Alarm Lamp




Emergency Button



Switch Built-in Design



High-Voltage Wire Insulation

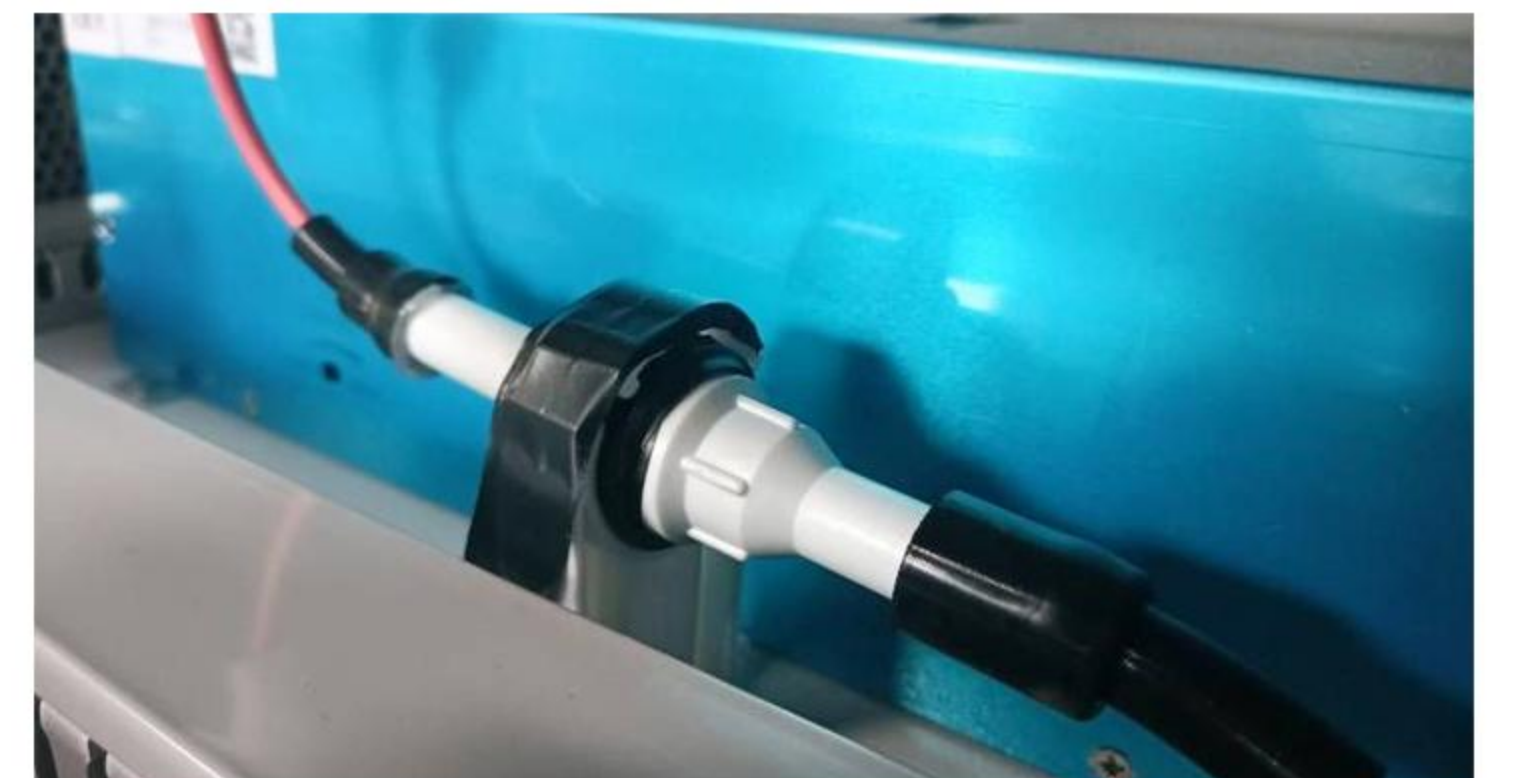

Insulation Support Frame



Notification Stickers



Wire Protection




Connector Insulation



WATCH VIDEO

AUTO ACTIVE FEEDER

Machine Size: 2210mm*530mm*920mm

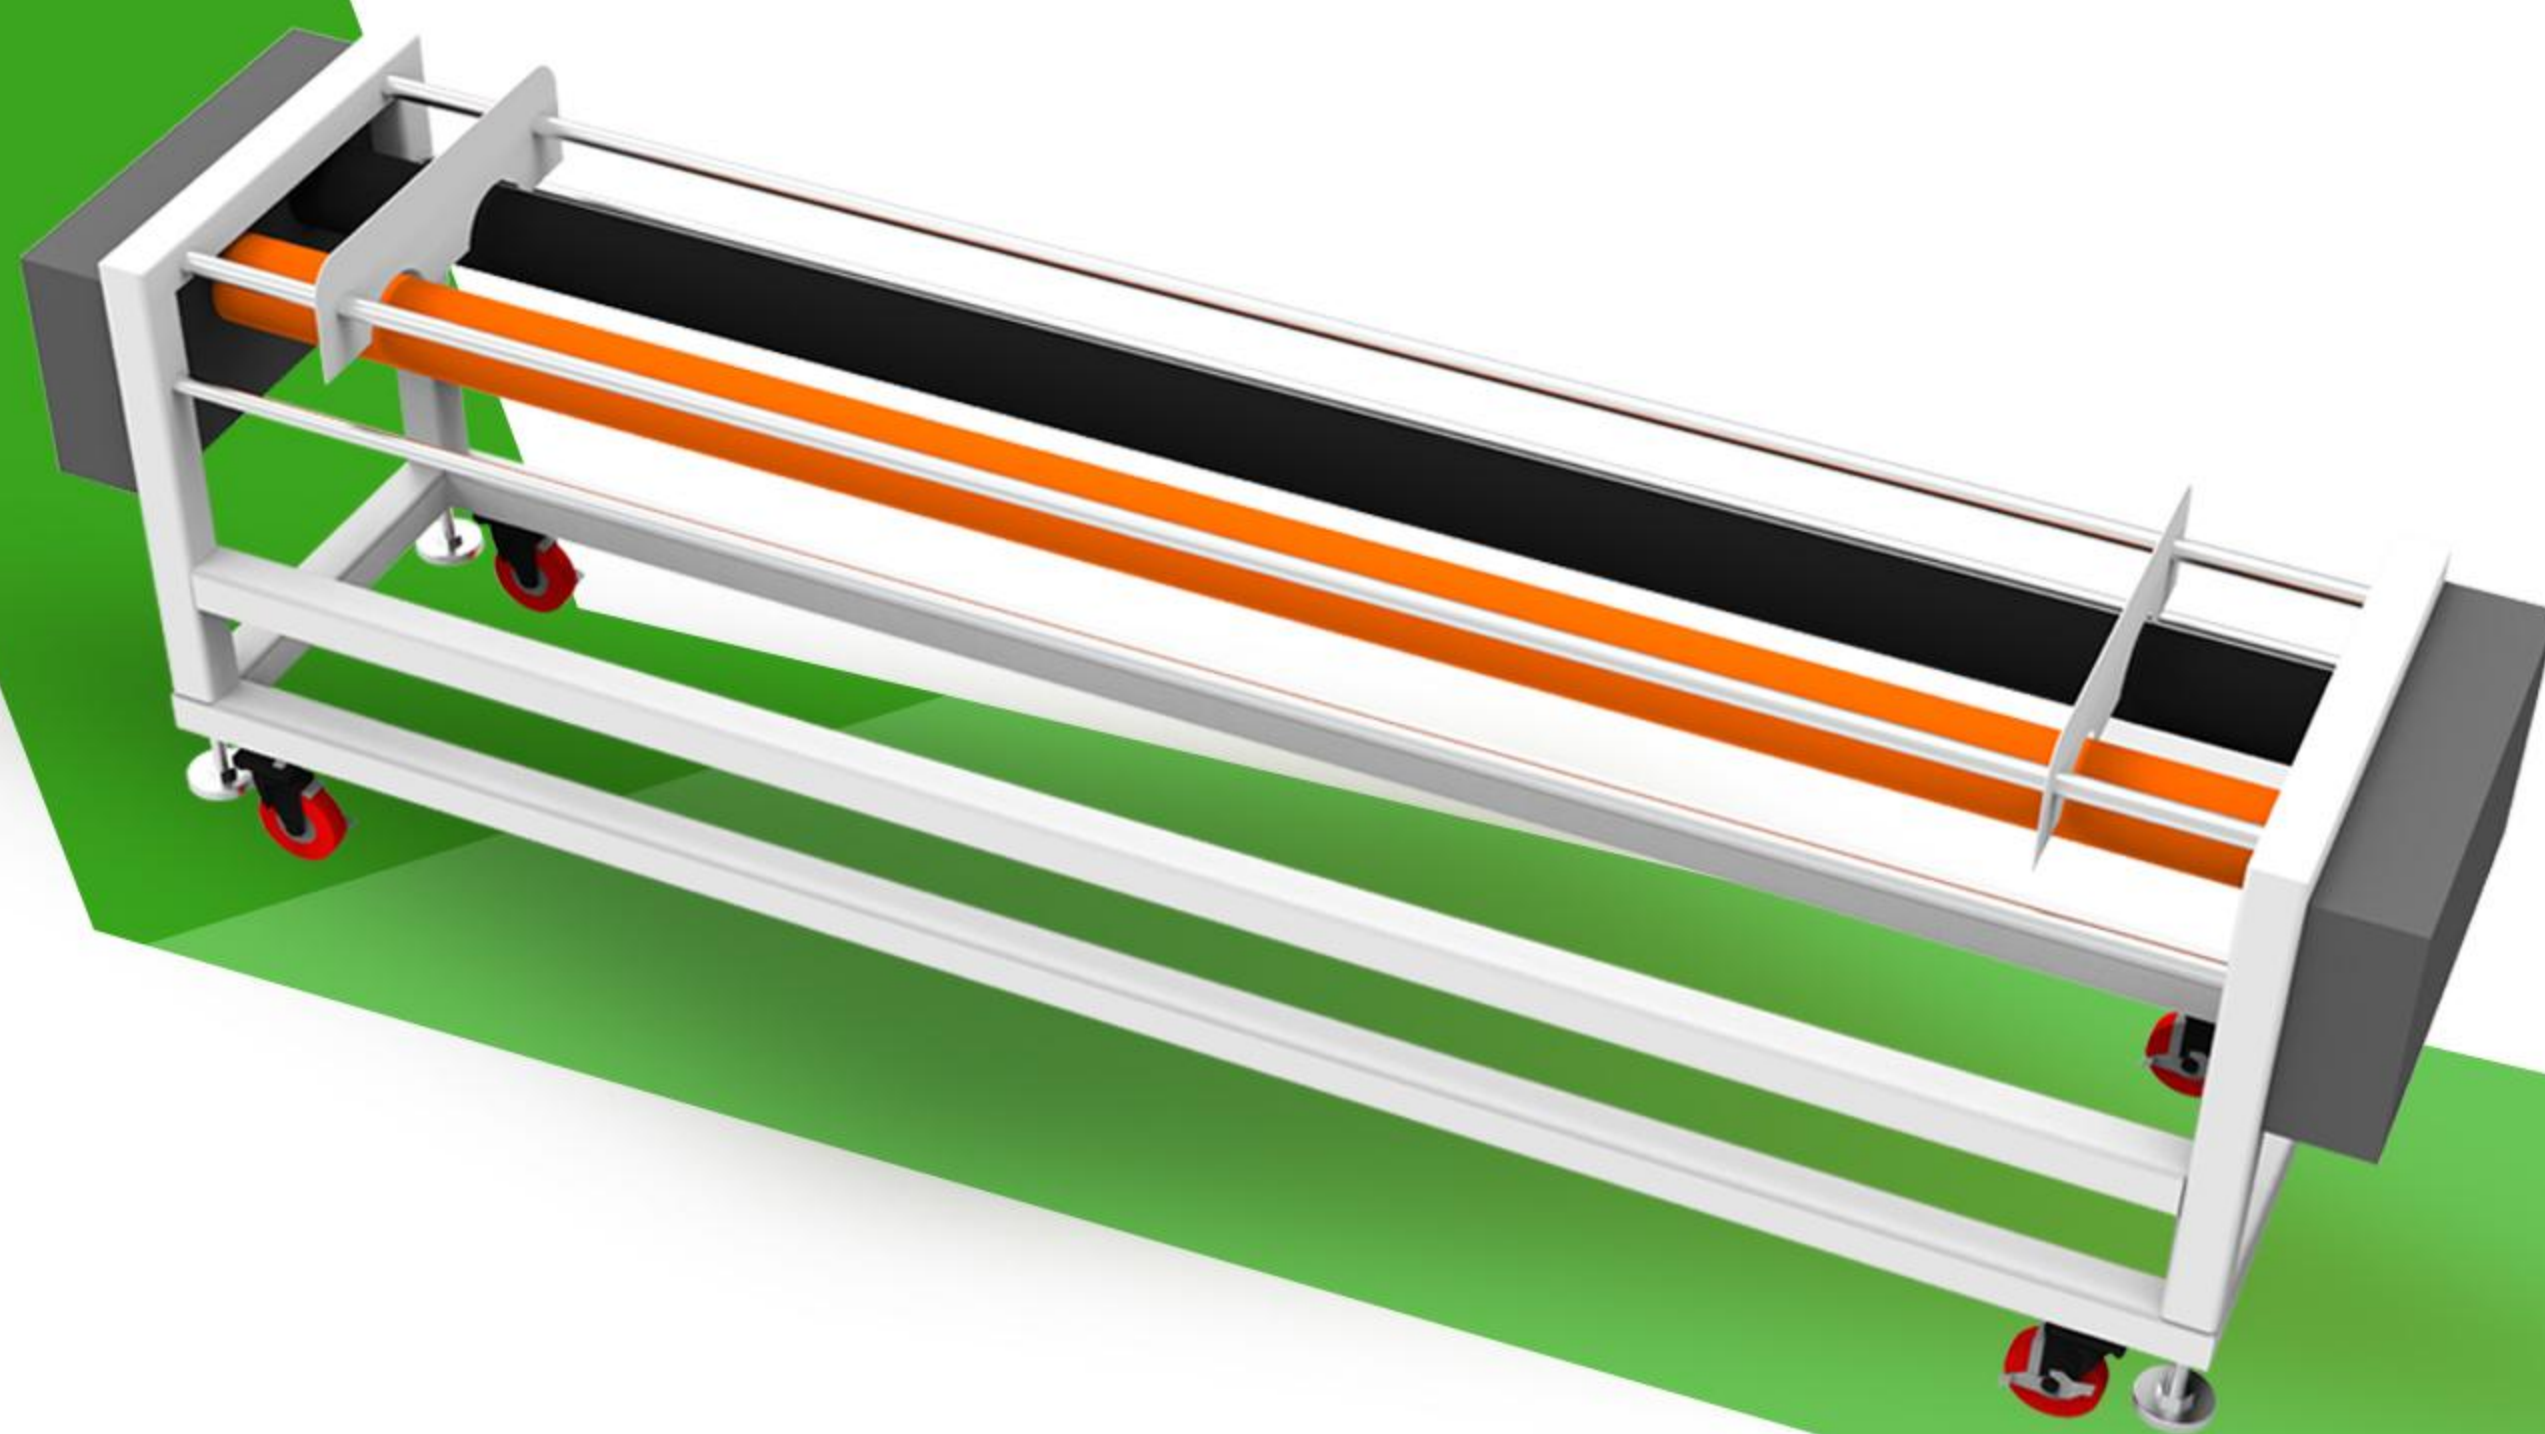

INTRODUCTION


KASU's automatic active feeder is specially designed for auto-feeding roll-to-roll fabric or other soft materials. Reasonable structural design can be adapt to a variety of fabrics.

It is equipped with high sensitivity sensor switch to sense the presence or absence of the materials and then decide to start feeding or stop. It has an independent control system and can be connected to any brand of the laser machine. Branded motion system and other quality electric spare parts can ensure 24 hours stable running.


KEY FEATURES



High Temperature Hardened Steel Frame Structure

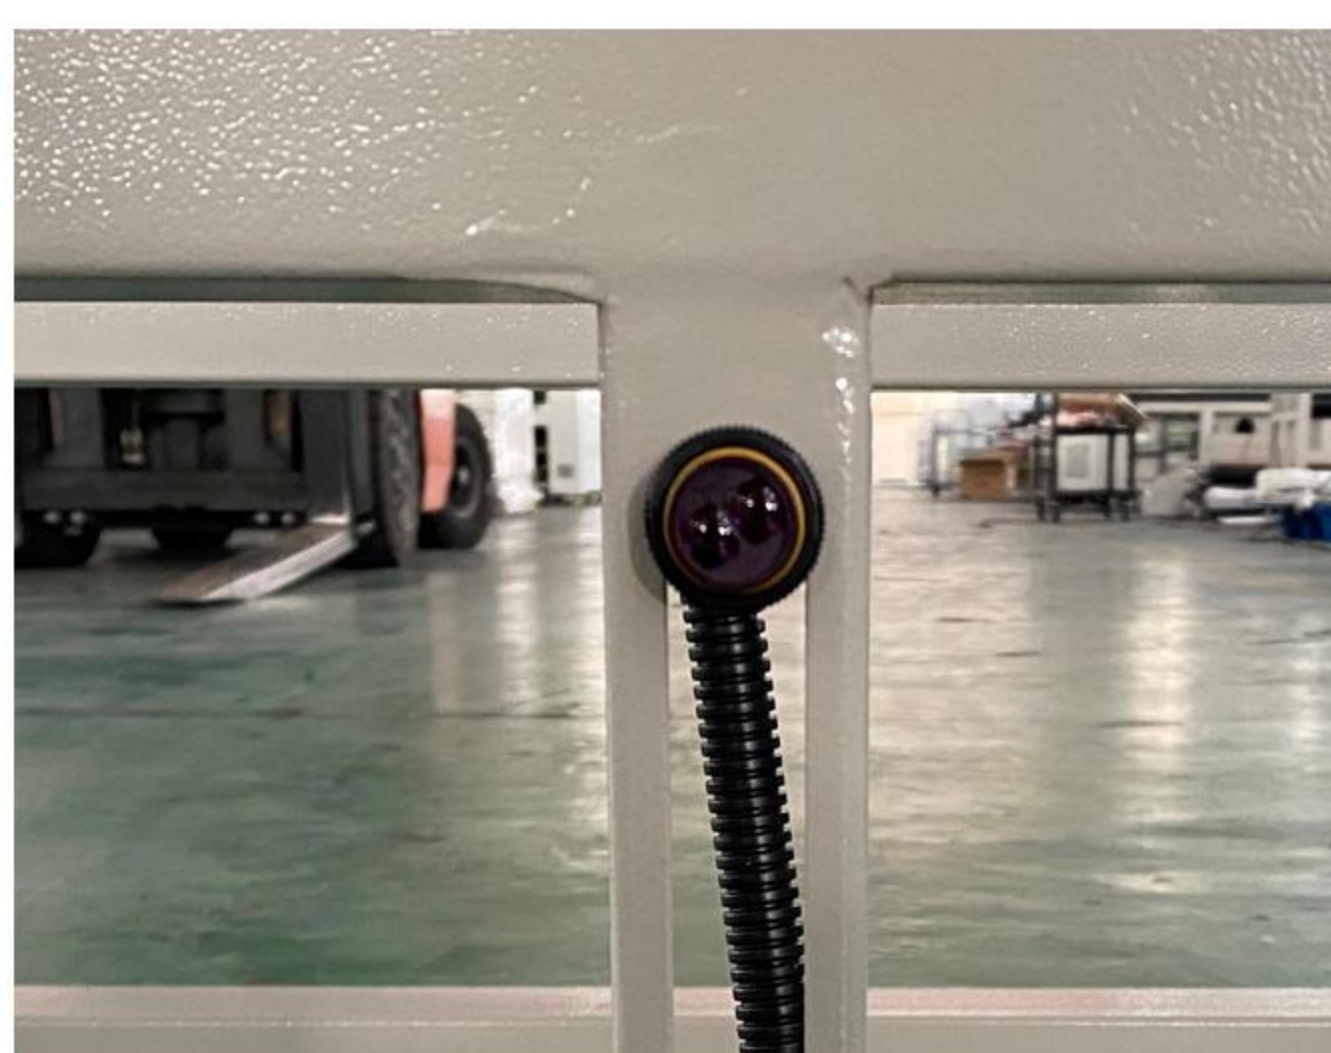


High Sensitivity Sensor Switch

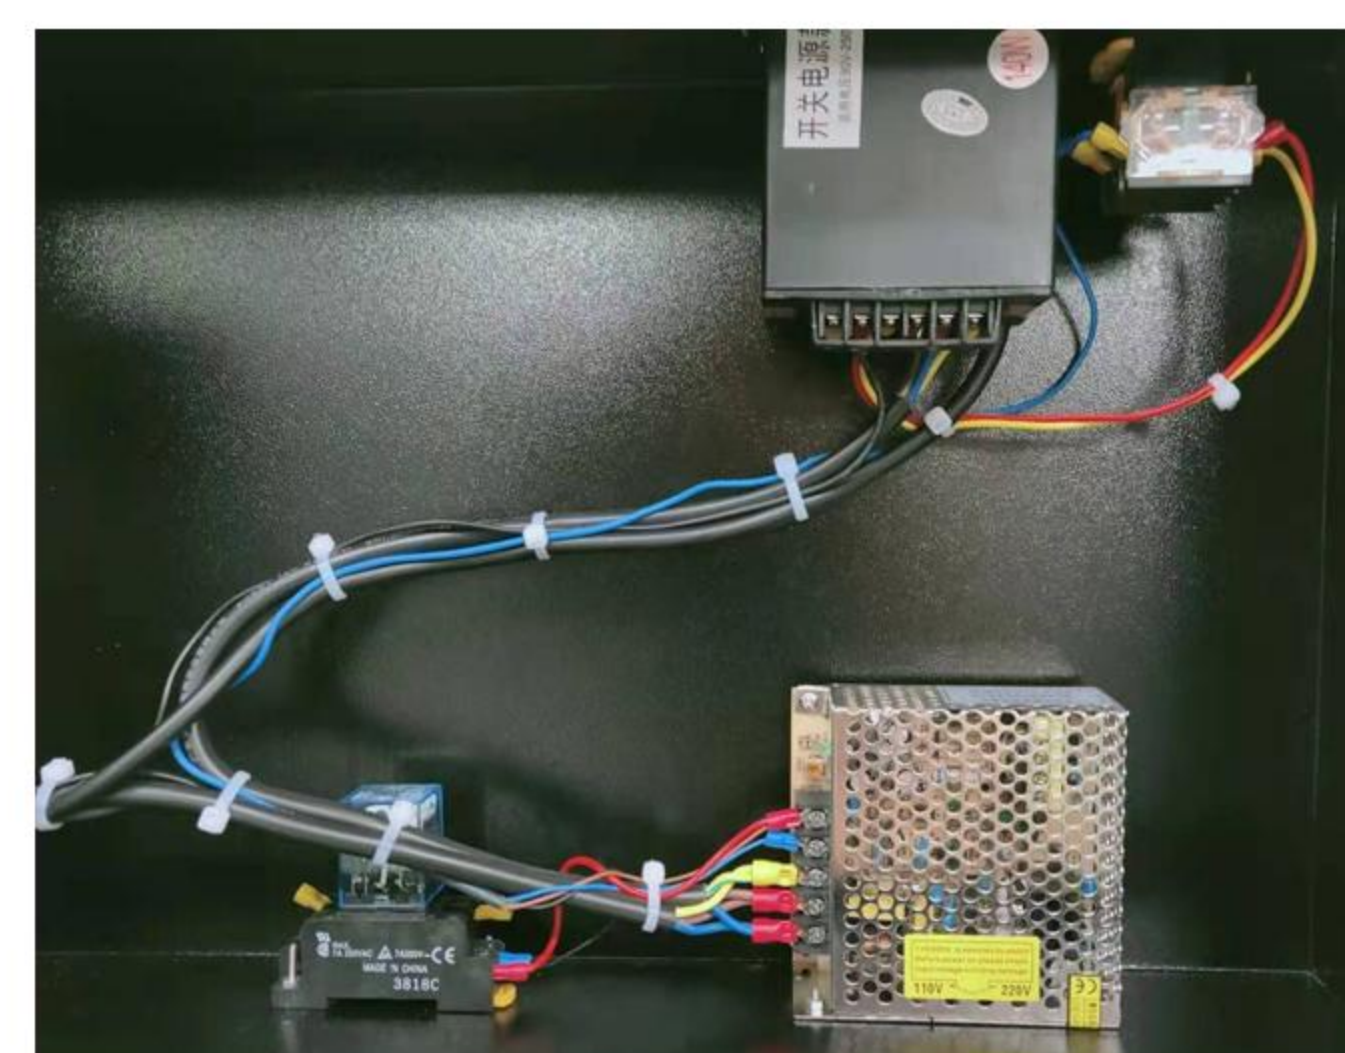

Independent Control Board



Width Adjustable Fabric Stopper

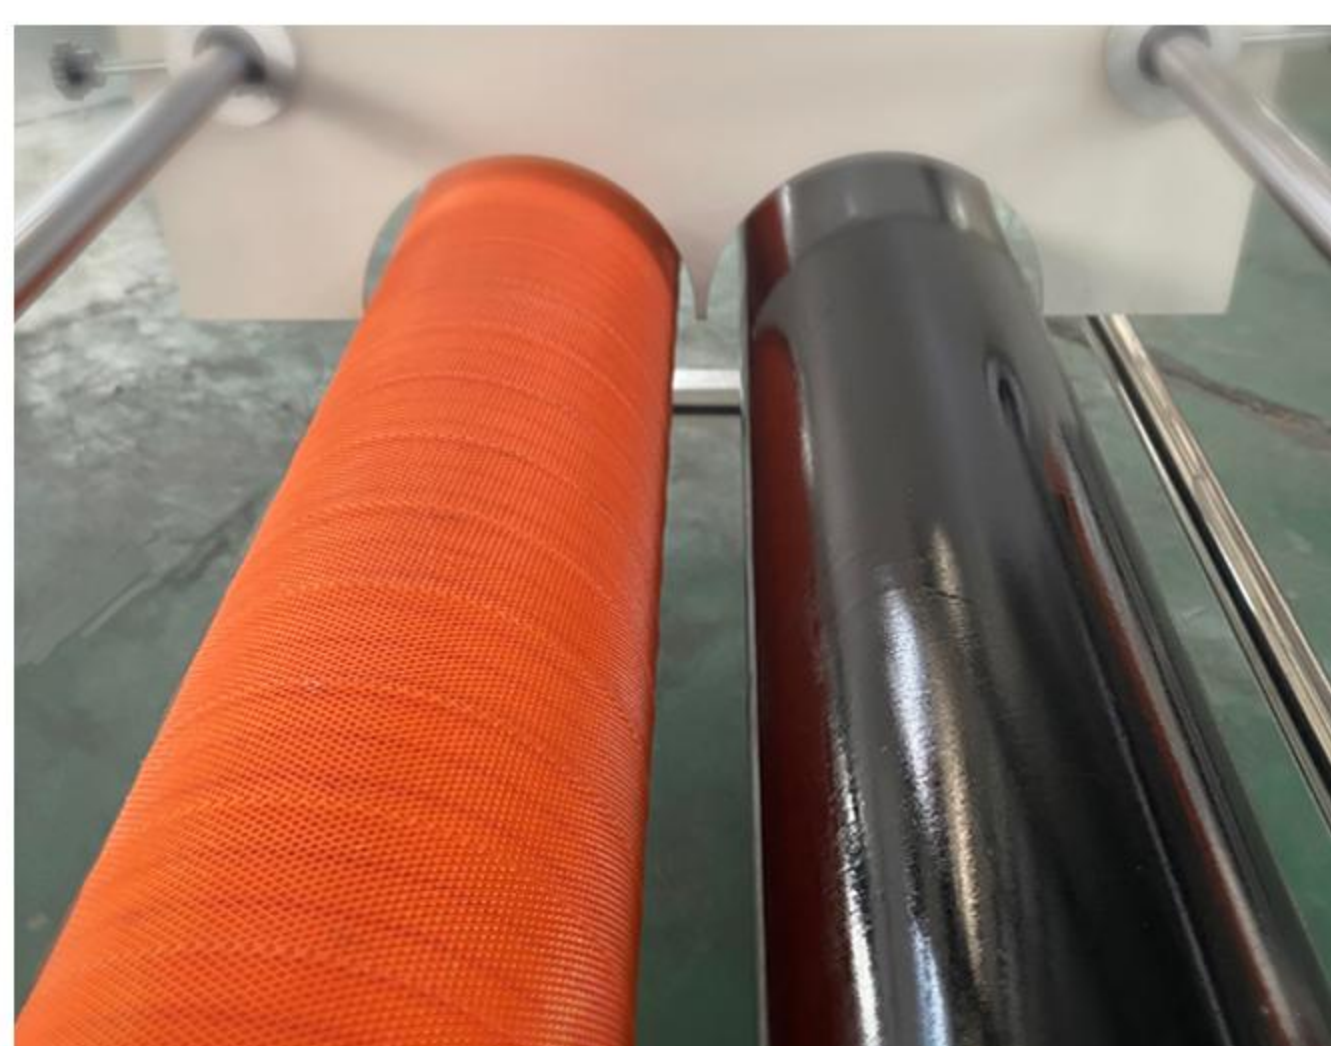

Well Designed Fabric Roller With Friction




Strong Universal Wheels & Machine Feet

■ MACHINE PARAMETERS

Working Area	1800MM*1200MM Vision Mode 1800MM*1400MM Non-Vision Mode	Software	KASU
Laser Type	Glass CO2 Laser Tube	Working Speed	<1000 MM/S
Laser Power	80/100/130/150W	Power Supply Requirements	AC220V±5% 50Hz/60Hz 1Phase
Heads of Laser	Dual Heads	Format Supported	AI\BMP\PLT\DXF\DST
Dimensions with Wood Package	2.28*2.5*2.14M / 2.24*1.55*1.16M	Positioning Accuracy	±0.1MM
Gross Weight	1450KG	Operating Temperature	minus 10°C~45°C
Motion System	Hybrid Step-Servo Motor	Operating Humidity	5-95%
Cooling System	5200 Industrial Water Chiller	Total Power	<1.5KW (Excluding exhauster)

■ SUCCESSFUL STORIES

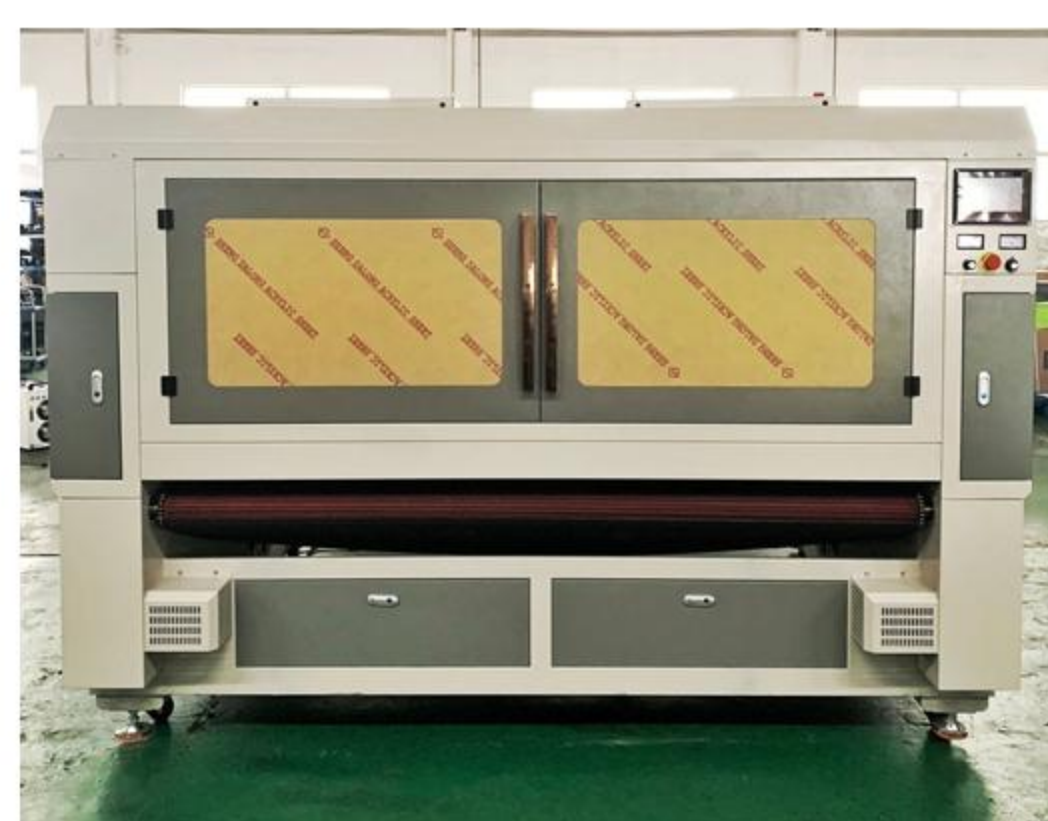

■ CONTACT US



WECHAT



WHATSAPP

Contact us now and get a live demo of how our digital cutting solutions help increase your cutting workshop productivity and efficiency.

✉ Email: kasu@kasulaser.com
 🌐 www.kasulaser.com / www.kasucutter.com
 🏢 Shanghai KASU Intelligent Technology Co., Ltd.

🏠 Suzhou KASU Intelligent Equipment Co., Ltd.
 📍 Factory: No. 20, Jiangnan Road, Taicang, Suzhou, Jiangsu, China